


Model 3A2BFC Circulator Coaxial

THIS DRAWING IS THE SOLE PROPERTY OF REC AND SHALL NOT BE COPIED OR REPRODUCED IN ANY FORM WHATSOEVER. THE CONTENTS ARE FOR THE PURPOSES ONLY OF QUOTATION TO OR MANUFACTURE FOR REC AND SHALL NOT BE USED AS A BASIS FOR QUOTATION TO OR MANUFACTURE FOR OTHER. THIS DRAWING SHALL BE RETURNED WITH QUOTATION OR AT TERMINATION OF MANUFACTURING CONTRACT OR ON DEMAND OF REC WHICHEVER IS FIRST.

| REVISIONS | | | | | |
|-----------|------|----------|-------------------|----------|----------|
| ZONE | REV. | ECO | DESCRIPTION | DATE | APPROVED |
| - | A | 20080207 | DRAWING INITIATED | 07/15/08 | . |

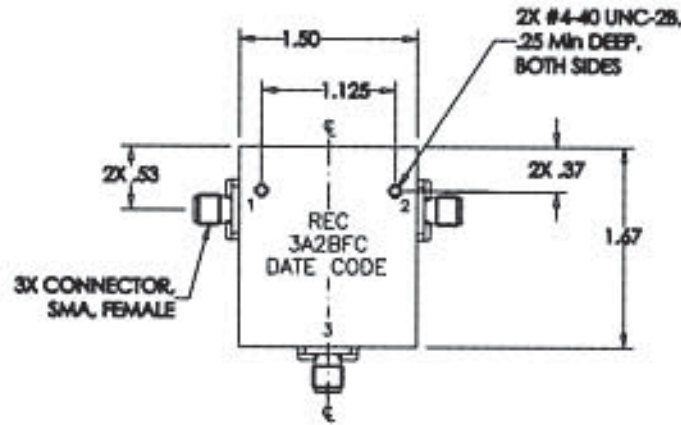

| ELECTRICAL CHARACTERISTICS | |
|----------------------------|---------------------|
| FREQUENCY RANGE | 700 - 960 Mhz |
| ISOLATION (MIN) | 15 dB. (19 dB GOAL) |
| INSERTION LOSS (MAX) | 0.7 dB |
| VSWR (MAX) | 1.60 : 1 |
| POWER | 150 Watts |
| TEMPERATURE RANGE | -40°C TO +75°C |

| | | | | |
|---|----------|-------------------------|----------------------------|----------|
| DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED | | DRAWN | DATE | 07/15/08 |
| TOLERANCES ON: | | CHECKED | DATE | |
| DECIMALS | ANGLES | ENG APPR. | DATE | 07/15/08 |
| .X ±.02 | ±1/2° | MFG APPR. | DATE | |
| .XX ±.01 | | FILE NAME: 3A2BFC | | |
| .XXX ±.005 | | CUSTOMER SPEC: | | |
| UNLESS OTHERWISE SPECIFIED ALL OVER | | MATERIAL: | TITLE: CIRCULATOR, COAXIAL | |
| NOTE: THIS DWG INCORPORATES THIRD ANGLE PROJECTION | | FINISH: | SIZE DWG. NO. B | |
|  | | WEIGHT: | REV A | |
| | | PATH: Y:\CAD\DRAWING\00 | 3A2BFC | |
| USED ON: | USED ON: | CAGE IDENT NO. | SCALE: 1:1 SHEET 1 OF 1 | |
| | | ORJ02 | | |